

HOW TO ORDER

The categories shown on this key are provided to cover standard features of **SWITCHLINK®**. Please use these figure numbers to ensure prompt and accurate processing of your order. A detailed description must accompany any special orders.

SWITCHLINK®

A	B	C
<input type="text"/>	<input type="text"/> <input type="text"/> <input type="text"/>	<input type="text"/> <input type="text"/> <input type="text"/>

Example:

A	B	C
I	072	WL1

A Model Number

I Maximum Recommended torque 1250 in-#
2-4" Flanged Ball Valve
3-4" Threaded Ball Valve
1 ½ -2" Plug Valve

II Maximum Recommended torque 500 in-#
Up to 1 ½" Flanged Ball Valve
Up to 2" Threaded Ball Valve
Up to 1" Plug Valve

B Standard Bottom Configurations Model I

KS1 -3 ¼ " B.C. with 3/8-16 tapped holes
Drive: 1 1/8" Dia. with ¼" Sq. Key

KS2 -5"B.C. with ½ -13 tapped holes, 1 ¼ " Stem Ht.
Drive: 1 1/8" Dia. with ¼" Sq. Key

KS3 -5"B.C. with ½ -13 tapped holes, 2" Stem Ht
Drive: 1 1/8" Dia. with ¼" Sq. Key

071 -70mm B.C. with 5/16-18 tapped holes
Drive: 1 1/8" Dia. with ¼" Sq. Key


072 -70mm B.C. with 5/16-18 tapped holes
Drive: 19mm sq.

073 -70mm B.C. with 5/16-18 tapped holes
Drive: 17 mm sq.

Model II

F05 -50mm B.C. with ¼-20 tapped holes
Drive: 14 mm sq.

SWITCHLINK®

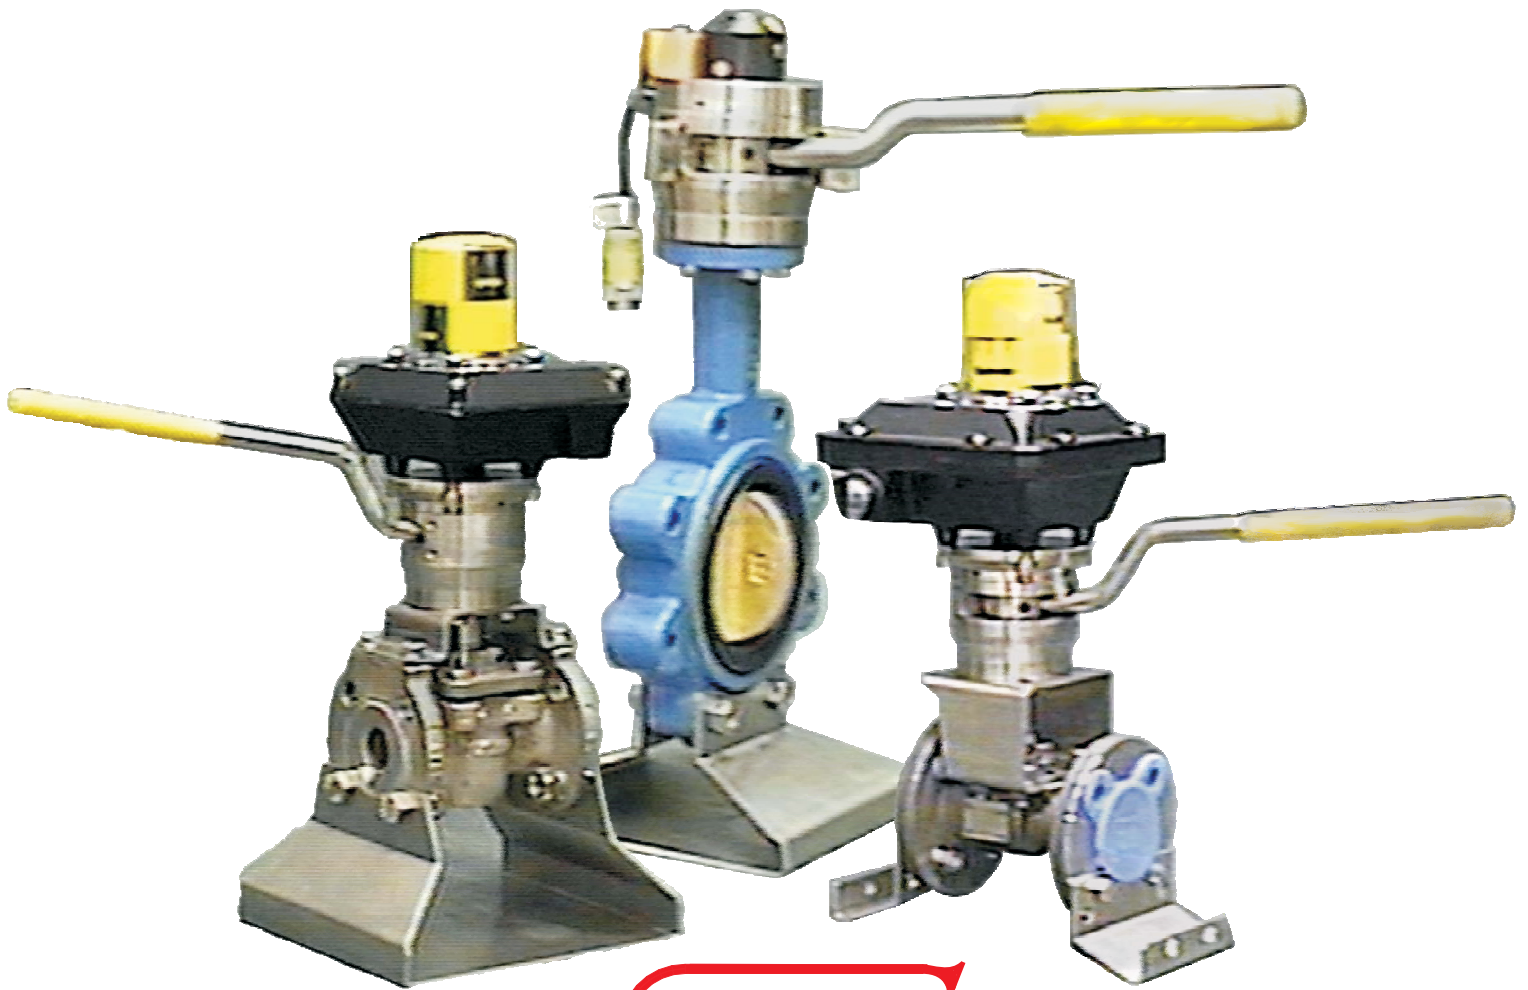

EMS_{o.}

ENGINEERING MANUFACTURING SERVICES CO.

5634 CANNON DR. MONROE, NC 28110

PHONE: 704-821-7325 FAX: 704-821-7391

EMAIL: emscompany@emsco-nc.com

www.emsco-nc.com

SWITCH MOUNTING MADE

Now mount a switch/signal device on a manually operated valve as easily as you would on most pneumatic actuators. **SWITCHLINK®** is a robust mechanical handle actuator used to manually operate a valve while providing a standardized switch/signal mounting surface.



STAINLESS STEEL IS STANDARD,
OTHER ALLOYS AVAILABLE.



NO MORE PROBLEMS WITH
SHEET METAL MOUNTING
KITS WEARING OUT OR THE SWITCH
DISENGAGING.

NO MORE YEARLY RE-DESIGN DUE TO
HANDLE CASTING CHANGES.

NO MORE WAITING 4 WEEKS FOR
CUSTOM DESIGNS.



What was once a difficult and
frustrating task is now simple with

SWITCHLINK®



C *Standard Top Configurations*

WL1	Westlock Standard Mount	AJ1	ASCO Standard Mount
WL2	Westlock Namur Mounting	AJ2	ASCO Namur Mount
WLB	Westlock Beacon	AJ3	ASCO Pointer
AC1	Accord Standard Mount	GO1	Go Switch Model 41 Std.
AC2	Accord Namur Mount	GO2	Go Switch Model 41 Namur
ST1	Stonel Onyx	KS1	Keystone Namur Mount
ST2	Stonel Quartz	PX1	
AX1	Automax Standard Mount	MN1	Moniteur
AX2	Automax Namur Mount	WO1	Worcester Mas
BR1	Bray Series 50	NA1	80 X 20mm Namur Std.
BR2	Bray Series 52	EF1	Effector IND Switch w/17105 puck
SV 1	Save Vision Namur		

ACCESSORIES



1. Mounting kits for use with non direct mounting valves.
2. Lockouts
3. Ten position function
4. Clean service/ wash down additions
5. Handle Extensions



CALL FOR PRICING, ORDERING INFORMATION,
AND YOUR SPECIAL REQUIREMENTS